




PG - Air blasts

FEATURES				
Model	Air consumption		i Ø Pipe mm	Air Inlet BSPP
	NL			
	3 bar	6bar		
PG 40	3,6	5,3	6	1/8" BSPP
PG 63	6,4	11,6	8	1/4" BSPP
PG 80	12,5	21	8	1/4" BSPP



OVERALL DIMENSIONS			
Model	A	B	C
	mm	mm	mm
PG 40	130	220	243
PG 63	160	260	283
PG 80	200	308	336

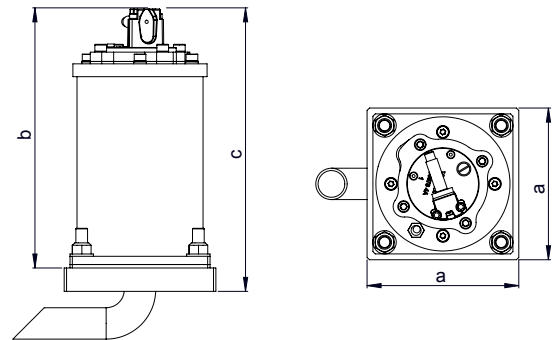

PG - AIR BLASTS

APPLICATION	Hopper and silo
POWDER	Large size, irregular shape, fibrous dust and flakes
PROBLEM SOLVING	Bridge and rat-holing

FEATURES

DUTY CYCLE	Discontinuous
WORKING PRESSURE	From 3 bar to 6 bar (from 43 psi to 87 psi)
PNEUMATIC CIRCUIT	Filter + flow control valve
AIR SUPPLY QUALITY	Class 5.4.1.
WORKING TEMPERATURE	From -20°C to 80°C (from -4°F to 176°F)
MAX NOISE LEVEL	105 dB (a)
TECHNOLOGY	High pressure jet
MATERIAL	Steel body and plate, PS040-063 nylon (PS080 aluminium) head

OPTIONS

TIMER	Adjustable from 30sec to 45min
MULTI-TENSION COILS	From 24v (Ac/Dc) to 230v
FULLY PNEUMATIC KIT	Available

This information is furnished without warranty, representation, inducement or license of any kind. It is accurate to the best OLI knowledge or is obtained from sources believed to be accurate. OLI therefore assumes no legal responsibility.